

R10404 SERIES

Thermally Conductive Silicone Sponge

Saint-Gobain® ThermaCool® R10404 series is a thermally conductive closed-cell silicone sponge rubber. This material offers thermal conductivity, electrical isolation and compression set resistance (vibration absorption). R10404 is the superior choice for battery pack gap filling, optimizing the efficiency and extending the service life of the individual battery cells. Its unique features make it an ideal gap filler for vibration-sensitive heat transfer applications.

The **ThermaCool** R10404 series viscoelastic core is specially designed to provide the following features:

- Silicone based, for long life and temperature stability
- Closed-cell sponge structure provides compression set resistance, critical for vibration control
- Thermally conductive
- Electrically isolative
- Conforms to irregular (cylindrical and other) surfaces

Available Sizes

Thickness in. (mm)	.031 (.79)	.063 (1.59)	.094 (2.38)	.125 (3.18)	.188 (4.76)	.250 (6.35)
Continuous Roll 36 in. (914 mm)	•	•	•	•	•	
Sheets 36in. × 36in. (914 mm × 914 mm)	•	•	•	•	•	•



APPLICATIONS

- Lithium ion battery pack for electric vehicles
- Computers
- Telecommunications
- Electrical insulation
- Military
- Medical
- Heat pipe assemblies
- Vibration mounts
- Press pads
- Decal transfer


ThermaCool R10404 Series — Properties

Performance tests are run using standard test procedures. The values presented are typical values and should not be used for specification purposes.

Property	Test Method	Value
Color	Visual	Light green
Thickness: inch (mm)	ASTM D374	1/32, 1/16, 3/32, 1/8, 3/16, 1/4 (0.8, 1.6, 2.4, 3.2, 4.8, 6.4)
Thermal Conductivity: W/mK	ASTM E1530	See chart below
Thermal Impedance: @ 10 psi (°C in ² /W)	ASTM D1530	See chart below
Tensile Strength: psi (kPa)	ASTM D412	120 (828)
Elongation: %	ASTM D412	150
Hardness: Shore A	ASTM D2240	13
Dielectric Strength: (volts/mil)	ASTM D149	100
Compression Deflection: @ 25%, psi (kPa)	ASTM D1056	18 (125)
Compression Set: %	ASTM D1056	15
Density: lbs./ft. ³ (kg/m ³)	ASTM D297	69 (1105)
Operating Temperature Range: °F (C°)	—	-80 to 400 (-62 to 205)

Compression: %	Thermal Conductivity W/mK		Thermal Impedance °C in ² /W (°C cm ² /W)	
	R10404 @ 1/8"	R10404 @ 1/16"	R10404 @ 1/8"	R10404 @ 1/16"
10	0.36	0.36	13 (86)	5.5 (36)
30	0.52	0.46	9 (57)	3.5 (23)
50	0.86	0.57	5 (34)	2 (13)

R10404 — 1/8"

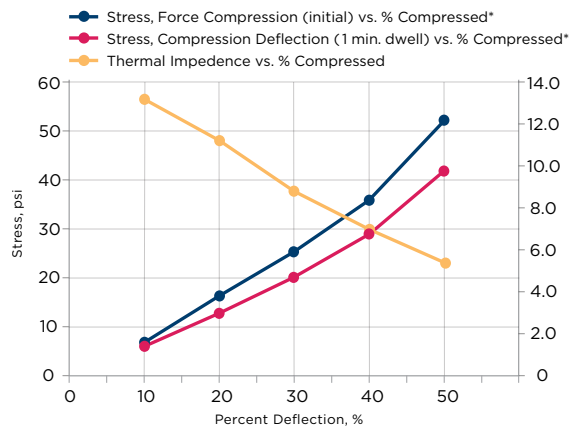

*Foams NTM-1 test procedure referenced

Options (subject to minimum order requirements)

Adhesive base: Low tack silicone pressure-sensitive adhesive and solvent-resistant acrylic pressure-sensitive adhesive on one side. (PSA increases thermal resistance by 0.05 C/W.)

Important Instructions

Because **Saint-Gobain** cannot anticipate or control every potential application, we strongly recommend testing of this product under individual application conditions prior to commercial use.

For PSA options, surfaces must be clean and free of oil, grease, moisture, dust and dirt. Isopropyl alcohol is good for cleaning the surface.

Recommended service temperature of base fabric is -80°F to 400°F (-62°C to 205°C).

Shelf Life

10 years after the date of manufacture when stored in original packaging at temperatures up to 95°F (35°C) and 70% relative humidity (see applicable data sheets for pressure-sensitive adhesive option).



IMPORTANT: It is the user's responsibility to ensure the suitability and safety of Saint-Gobain products for all intended uses and that the materials to be used comply with all applicable regulatory requirements. Saint-Gobain assumes no responsibility for any product failures that occur due to misuse of the materials it provides arising out of the design, fabrication or application of the products into which the materials are incorporated.

WARRANTY: For a period of 6 months, Saint-Gobain warrants this product(s) to be free from defects in manufacturing. The only obligation under any applicable product warranty will be to replace any portion proving defective, or at our option, to refund the purchase price thereof. SAINT-GOBAIN DISCLAIMS ALL IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE.